SPECIFICATIONS GRAPHIC PANEL SIZES

Finished graphic panel size

2300 x 850/800mm [Includes 200mm bleed]

Visual graphic area

2100 x 850/800mm

SYSTEM SIZES

Boxed size

850mm - 900 [l] x 105 [w] x 105 [d]mm 800mm - 850 [l] x 105 [w] x 105 [d]mm

Assembled size

850mm - 865 [w] x 270 [d] x 2185 [h]mm 800mm - 815 [w] x 270 [d] x 2185 [h]mm

BOXED WEIGHT

850mm - 2.1kg 800mm - 2.0kg

NOTE: Please test your substrate suitability before use.

COMPONENT LIST

1x Zeta unit

1x 3 part telescopic pole

1x Graphic hanger including self-adhesive hanging strip


1x Carry bag


plex


International Patent Application No. WO 02/057588 No. PCT/GB02/00129 in USA

Issue 5 - April 2014

ZETA BANNERSTAND ASSEMBLY INSTRUCTIONS





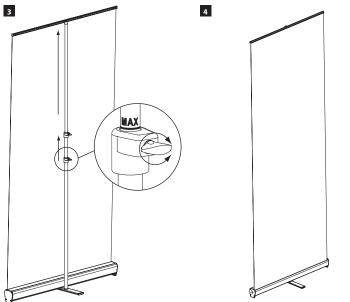

IMPORTANT NOTICE:

When retracting a graphic always slowly guide it into base housing, otherwise graphic damage may occur.


GRAPHIC ATTACHMENT


Use allen key that is stored in underside of foot.




Attach self-adhesive hanging strip to rear top edge of graphic.








Attach front bottom edge of graphic panel to double-sided tape on leader sheet.




Holding onto graphic, remove locking pin and allow to slowly retract into unit.



IMPORTANT NOTICE:

To ensure a proper bond between graphic and double-sided tape, pressure must be applied. The adhesive should be allowed to cure for 24 hours before use.

ADDING OR REMOVING GRAPHIC TENSION



ADDING TENSION

Insert a standard flat headed screwdriver into slot located in the end of unit and turn clockwise to add extra graphic tension.

REMOVING TENSION

To un-tension graphic panel place a flat headed screwdriver into the slot and push to disengage ratchet. Hold in and turn anti-dockwise until tension in spring is released. To remove graphic panel carefully peel it off leader sheet. The graphic hanger can also be removed or a new hanger can be purchased.